

LED VAPOR TIGHT



PRODUCT DESCRIPTION:

The Vapor Tight Fixture is constructed with a full length polycarbonate lens, and a one piece polycarbonate body. Product applications include utility lighting, parking garage lighting, stairwell lighting, and low bay lighting

FEATURES:


- 120-277V Standard, 347V available
- 0-10V dimming standard
- CRI ≥80
- L70: 100,000
- Ceiling, wall, or suspension mounted
- Optional motion sensors and battery backup options available
- Suitable for wet locations
- IP65 rated with hermetic sealing
- Five year limited warranty
- Assembled in USA available upon request
- NSF Certified

CONSTRUCTION:

- 2ft Product Dimensions: 26" x 6.75" x 4.75" (L x W x H)
- 4ft Product Dimensions: 50" x 6.75" x 4.75" (L x W x H)
- Non-corrosive polycarbonate (PC) housing
- Stainless Steel spec grade hasps and clips
- Back and end knockouts
- White finish standard



LINE DRAWING:

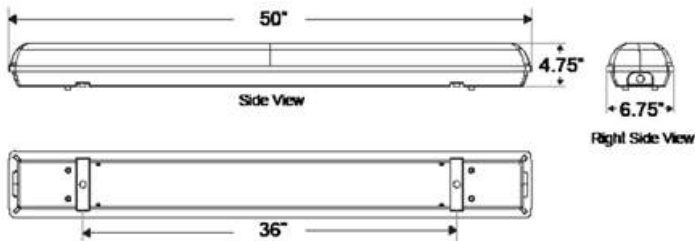

TYPE	SIZE	VOLTAGE	NOMINAL WATTAGE	CCT	OPTIONS
APVT = Vapor Tight	4= 4 ft 2= 2 ft	U= 120-277V 3= 347V	25= 25W 35= 35W 45= 45W	40= 4000K 50= 5000K	(OMIT)= None EM= Battery Backup Unit MS= Bi-Level Motion Sensor MSO= On/Off Motion Sensor MSV= Bi-Level Motion Sensor w/ Remote Control Capability

ACCESSORIES
DESCRIPTION
Cable Kit 15' Loop x Loop 1 Pair
Remote Control for MSV Sensor Commissioning

NOTES:

1. In the event of a power failure, the battery backup unit switches to emergency mode (700 lumen output) and operates the fixture for a minimum of 90 minutes
2. 2' product available in 25W only

LED VAPOR TIGHT

SPECIFICATIONS:

		APVT2U2540	APVT2U2550	APVT4U2540	APVT4U2550	APVT4U3540	APVT4U3550	APVT4U4540	APVT4U4550
ITEM	SPECIFICATION	DETAILS							
GENERAL PERFORMANCE	Power Consumption (W)	22.7	22.8	23.4	23.4	34.2	33.6	45.2	44.7
	Lumens Delivered (lm)	3,039	3,003	3,216	3,221	4,714	4,654	6,249	6,217
	Efficacy (lm/W)	134	132	137	138	138	138	138	139
	CRI	≥80							
	Color Temperature (K)	4000K, 5000K							
	L70 Lifetime (hours)	100,000							
	Color Consistency	Proprietary binning for uniform color							
ELECTRICAL	Power Factor	0.9							
	Input Voltage	120-277V, 347V (optional SDT)							
PHYSICAL	Weight	7.5lbs							
	Lens	Translucent							
	Mounting	Surface Mounting, Suspended Mounting							
	Operating Temperature	-30°C to 40°C							
	Humidity	20-85% RH, non-condensing							
CERTIFICATION	Certification	cULus, FCC, NSF							
	Material Usage	RoHS compliant; no mercury							
	Environment	Indoor / Outdoor Covered - Wet, IP65							
	Warranty	5 Years							

COMPATIBLE DIMMERS:

MAKE	DIMMER MODEL
Lutron	NFTV0-10
Leviton	IP710 DL